


## PAJ

- TI - METHOD FOR FORMING SPURIOUS TILE PATTERN
- AB - PURPOSE: To form the tile pattern at a low cost by coating a primer having an adhesive property after drying on a wall surface, etc., then sticking a stencil on the primer, further coating a pattern forming paint 4, removing the stencil, and coating a top coat.
- CONSTITUTION: The primer 2 having an adhesive property after drying is coated on a wall surface 1, etc., and the stencil 3 is stuck on the primer. The pattern forming paint 4 is then coated, then the stencil 3 is removed, and the top coat 5 is coated, as required. In this case, an emulsion paint is used as the primer 2, the glass transition temp. ( $T_g$ ) of the synthetic resin as the binder is controlled to  $\leq 10$  deg.C, and the solid matter volume concn. (PVC) is adjusted to 5-45%. The stencil 3 is made, for example, of a synthetic resin, and its expansion ratio is regulated to  $\leq 10$ . As a result, a spurious tile pattern can be inexpensively formed on a wall surface, etc.
- PN - JP63062577 A 19880318
- PD - 1988-03-18
- ABD - 19880803
- ABV - 012283
- AP - JP19860206604 19860902
- GR - C518
- PA - KIKUSUI KAGAKU KOGYO KK
- IN - IWASAKI DAIJIRO; others: 02
- I - B05D5/06

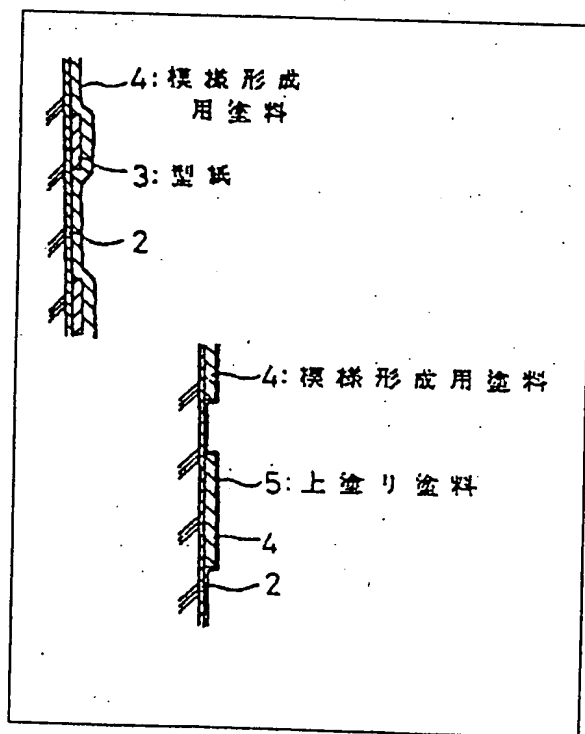

Best Available Copy